

ocean 8 XL


BERRY  ALLOC



bloom silver grey




jazz light grey

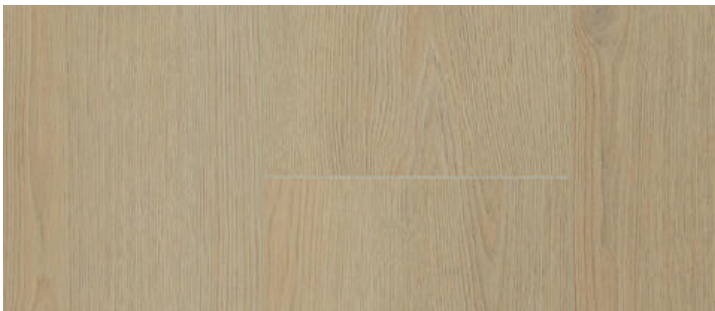

select sand natural



jazz sand natural

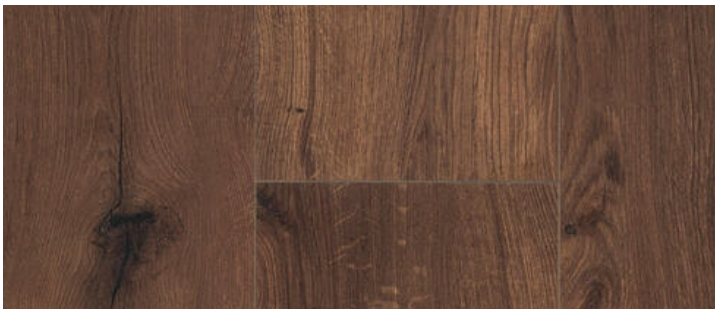

gyant warm brown



100% water resistant



scratch resistance



fade & stain free



easy to install



easy to maintain



ideal for underfloor heating & cooling



4V

LIFETIME WARRANTY




32

AC4



ocean 8 XL

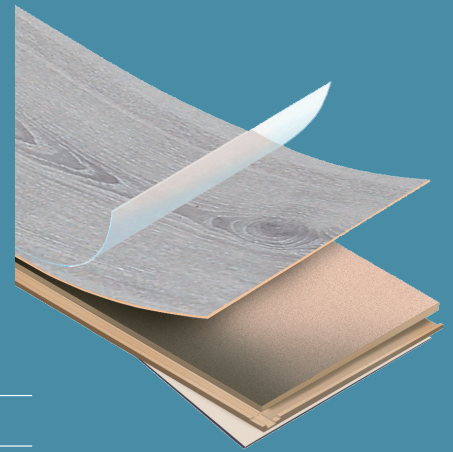

	contains	m2	ft2	weight
1 pack Ocean 8 XL	6 planks	2,95 m2	31.72 ft2	21,1 kg
1 pallet Ocean 8 XL	54 packs	159,14 m2	1712.92 ft2	1159 kg

product description

Dimensions	2038 x 241 mm
Total Thickness	8 mm
Bevels	4
Level of use according to European standard EN10874	23 heavy domestic use 32 general commercial use
Residential warranty	lifetime
Commercial warranty	5 years
Loc System	PentaLoc

Composition

Surface layer	Direct laminated paper, impregnated with melamine resin.
Substrate	Moisture resistant High Density Fiberboard (HDF) treated with hydro+ water repelling technology.
Backing	Direct laminated paper, impregnated with melamine resin.

tests results

Abrasion resistance	EN13329	AC4 (IP≥4000)
Impact resistance	EN13329	small ball : ≥ 35 mm - big ball : ≥ 750 mm
Thickness swelling	ISO 24336	12% (requirement ≤ 18%)
Water resistance	ISO 4760	up to 24 hours
Fire resistance	EN13501-1	Cfl-S1
Formaldehyde emission	EN717-1	E1
Density	EN323	900 kg/m ³
Resistance to staining	EN438	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg	EN16581	no damage (foot type 0)
Effect of a castor chair	EN425	no damage with type W wheels
Thermal resistance in combination with underlay Excellence Plus	ISO 8302	0,08 m ² K/W – Suitable for floor heating/cooling. Detailed instructions on www.berryalloc.com .
Slip resistance	EN13893	DS



made in Belgium

2038 x 241 x 8mm